


TO RE-ORDER ELEMENTS, SPECIFY		
DESCRIPTION	QTY	LOC
EL227111ETB	4	TOP/BOT
EL227111EM	2	MID


WIRE SIZES

NOTE: ALL WIRES TO BE TYPE SEW/SF2, #10 AWG MINIMUM UNLESS NOTED

#6311
30A RELAY
208-240V
COIL
DPST-NO

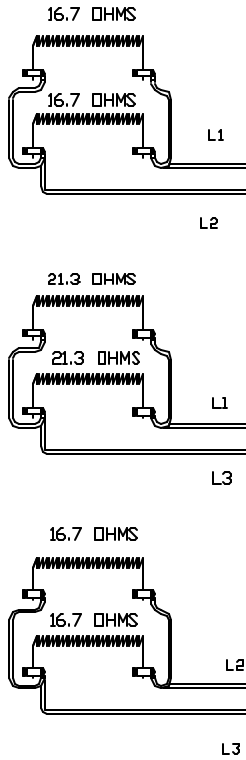

10 GA WIRE
SEW



POWER REQ'TS
208 VOLTS
3 PHASE
60 HERTZ
43 AMPS
14400 WATTS

CONTROL WIRING NOTE
ALL CONTROL WIRES
#12 AWG #4609
UNLESS OTHERWISE NOTED

CAUTION

TO PROVIDE CONTINUED PROTECTION AGAINST THE RISK OF ELECTRIC SHOCK, CUSTOMER'S POWER SUPPLY MUST BE PROPERLY GROUNDED.

#12 GA
#4609

#10 GA
#4209

#6835
30A RELAY
W/12V
DC COIL

#6770-CONTROL
TRANSFORMER
OUTPUT=24VAC

FUSE #6726
1/2 AMP

TYPE K T/C
6750-1

#6060-1
#22GA WIRE
MULTI-CORED

CONE FIRE
SENTRY 2.0

UL/CUL LISTED

2350°F

REV	DATE	BY	DESCRIPTION
-	12/19/01	DTB	

SWITCH BOX ASSY- 42017-2

PARAGON INDUSTRIES
2011 SOUTH TOWN EAST BLVD
MESQUITE, TEXAS 75149

WIRING DIAGRAM

208V, 3 PHASE, 60HZ, 14400WATTS

PART NO. 227111EA00

VIK243-SEN-C

REV -