


WIRING NOTE

ALL WIRES #14 AWG,
TYPE SEW/SF2 MINIMUM
UNLESS OTHERWISE NOTED

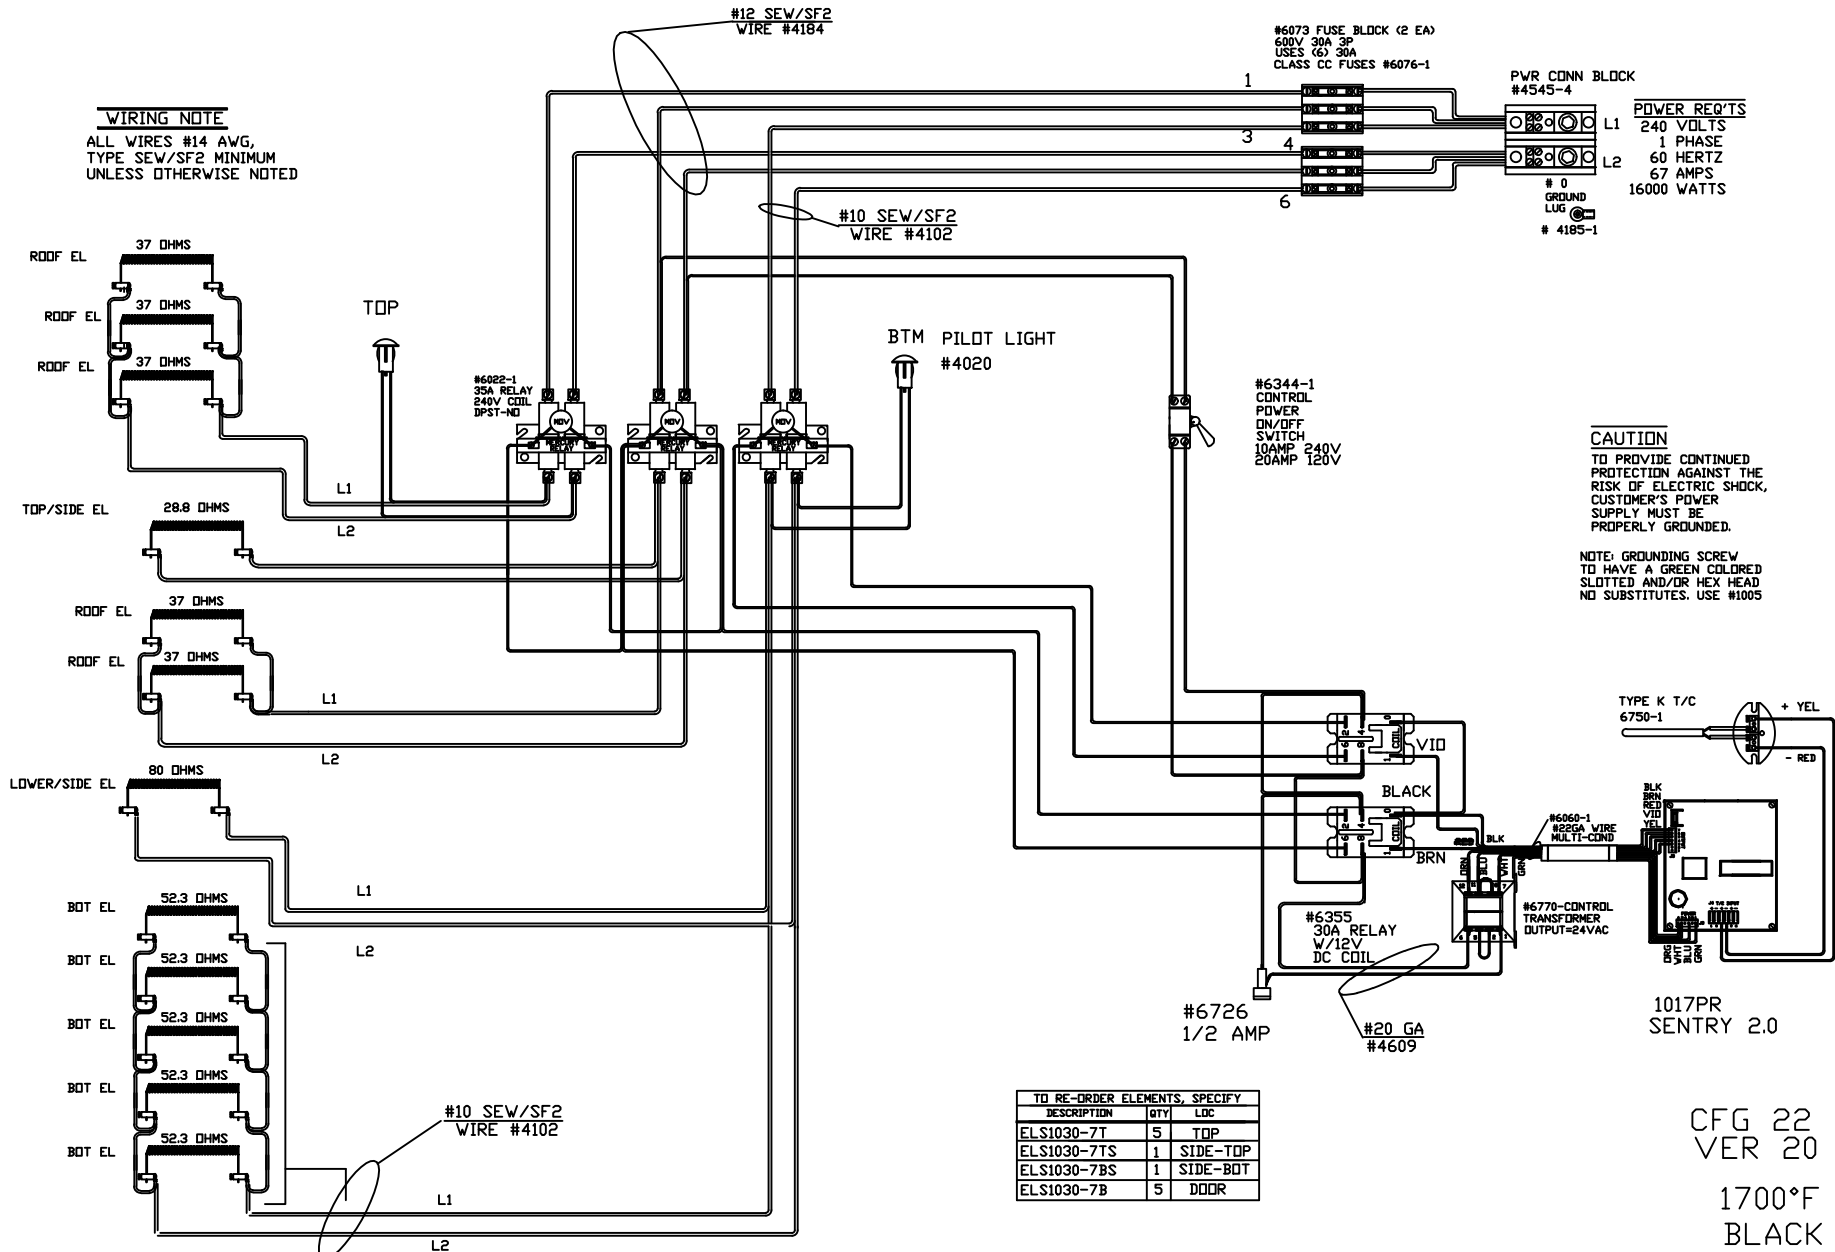

CAUTION
TO PROVIDE CONTINUED
PROTECTION AGAINST THE
RISK OF ELECTRIC SHOCK,
CUSTOMER'S POWER
SUPPLY MUST BE
PROPERLY GROUNDED.

NOTE: GROUNDING SCREW
TO HAVE A GREEN COLORED
SLOTTED AND/OR HEX HEAD
NO SUBSTITUTES. USE #1005

TO RE-ORDER ELEMENTS, SPECIFY		
DESCRIPTION	QTY	LDC
ELS1030-7T	5	TOP
ELS1030-7TS	1	SIDE-TOP
ELS1030-7BS	1	SIDE-BOT
ELS1030-7B	5	DDDR

CFG 22
VER 20

1700°F
BLACK

REV	DATE	BY	DESCRIPTION
-	4/01/09	DTB	
A	4/22/09	DTB	ADDED PWR SW & PL

SWITCH BOX ASSY- 42174-1

PARAGON INDUSTRIES
2011 SOUTH TOWN EAST BLVD
MESQUITE, TEXAS 75149

WIRING DIAGRAM

240V, 1 PHASE, 60HZ 16000WATTS

NOTE: RED WIRE NOT USED ON HARNESS

PART NO.	REV
S1030-7	A
CLAMSHELL 56X30X16	FILE