


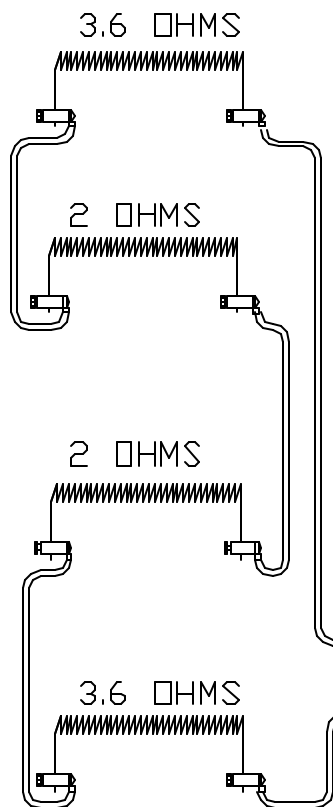


WIRING NOTE

ALL WIRES #14 AWG,
TYPE SEW/SF2 MINIMUM
UNLESS OTHERWISE NOTED

POWER REQ'TS

200 VOLTS
1 PHASE
60 HERTZ
17.9 AMPS
3580 WATTS

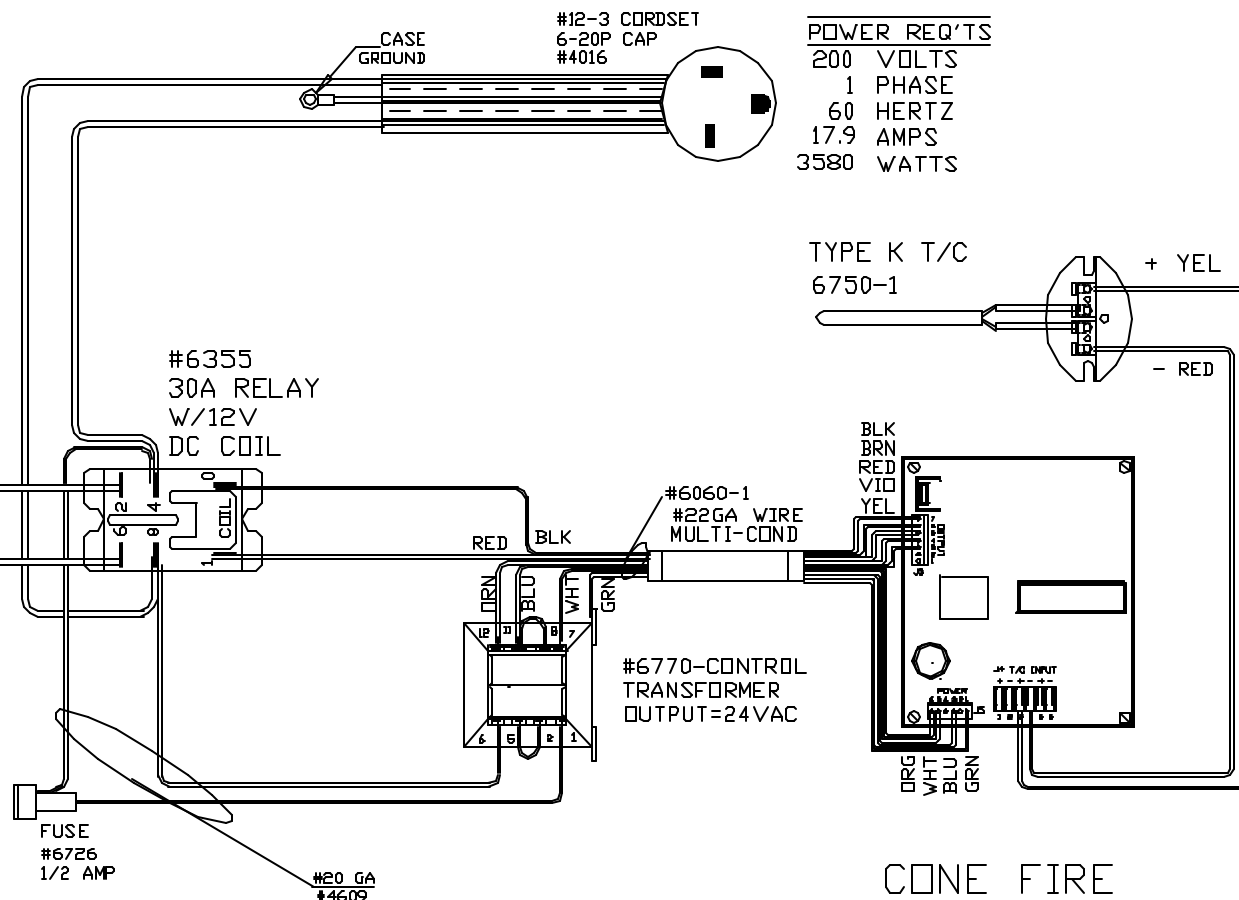

TYPE K T/C
6750-1

+ YEL

- RED

TO RE-ORDER ELEMENTS, SPECIFY

DESCRIPTION	QTY	LOC
EL6732111TB	2	TOP&BOT
EL6732111M	2	MIDDLE

CONE FIRE
SENTRY 2.0

NOTE: PLEASE REFER
TO THIS NUMBER WHEN
ORDERING PARTS FOR
THIS KILN

MAX. TEMP.
1288°C
2350° F

ORIGINAL ISSUE 2-6-95		BY NJM
DATE	BY	DESCRIPTION
A 7-1-98	NJM	UPDATED DRAWING & COMPONENTS
B 6/28/01	DTB	CHG DTC TO SENTRY

SW BOX # 4674

PARAGON INDUSTRIES
2011 SOUTH TOWN EAST BLVD
MESQUITE, TEXAS 75149

WIRING DIAGRAM
TNF663 - 800C
200V 1PH 60HZ 3580W

PART NO.	6732111	REV
By Norm Montesino		B
		FILE