

WIRING NOTE


ALL WIRES #14 AWG,
TYPE SEW/SF2 MINIMUM
UNLESS OTHERWISE NOTED

CAUTION

TO PROVIDE CONTINUED
PROTECTION AGAINST THE
RISK OF ELECTRIC SHOCK,
CUSTOMER'S POWER
SUPPLY MUST BE
PROPERLY GROUNDED.

NOTE: GROUNDING SCREW
TO HAVE A GREEN COLORED
SLOTTED AND/OR HEX HEAD
NO SUBSTITUTES. USE #1005

NOTE: THE SURFACE OF THE
INSULATED WIRES MARKED (X)
TO BE COLORED GREEN, WITH
OR WITHOUT ONE OR MORE
YELLOW STRIPES.

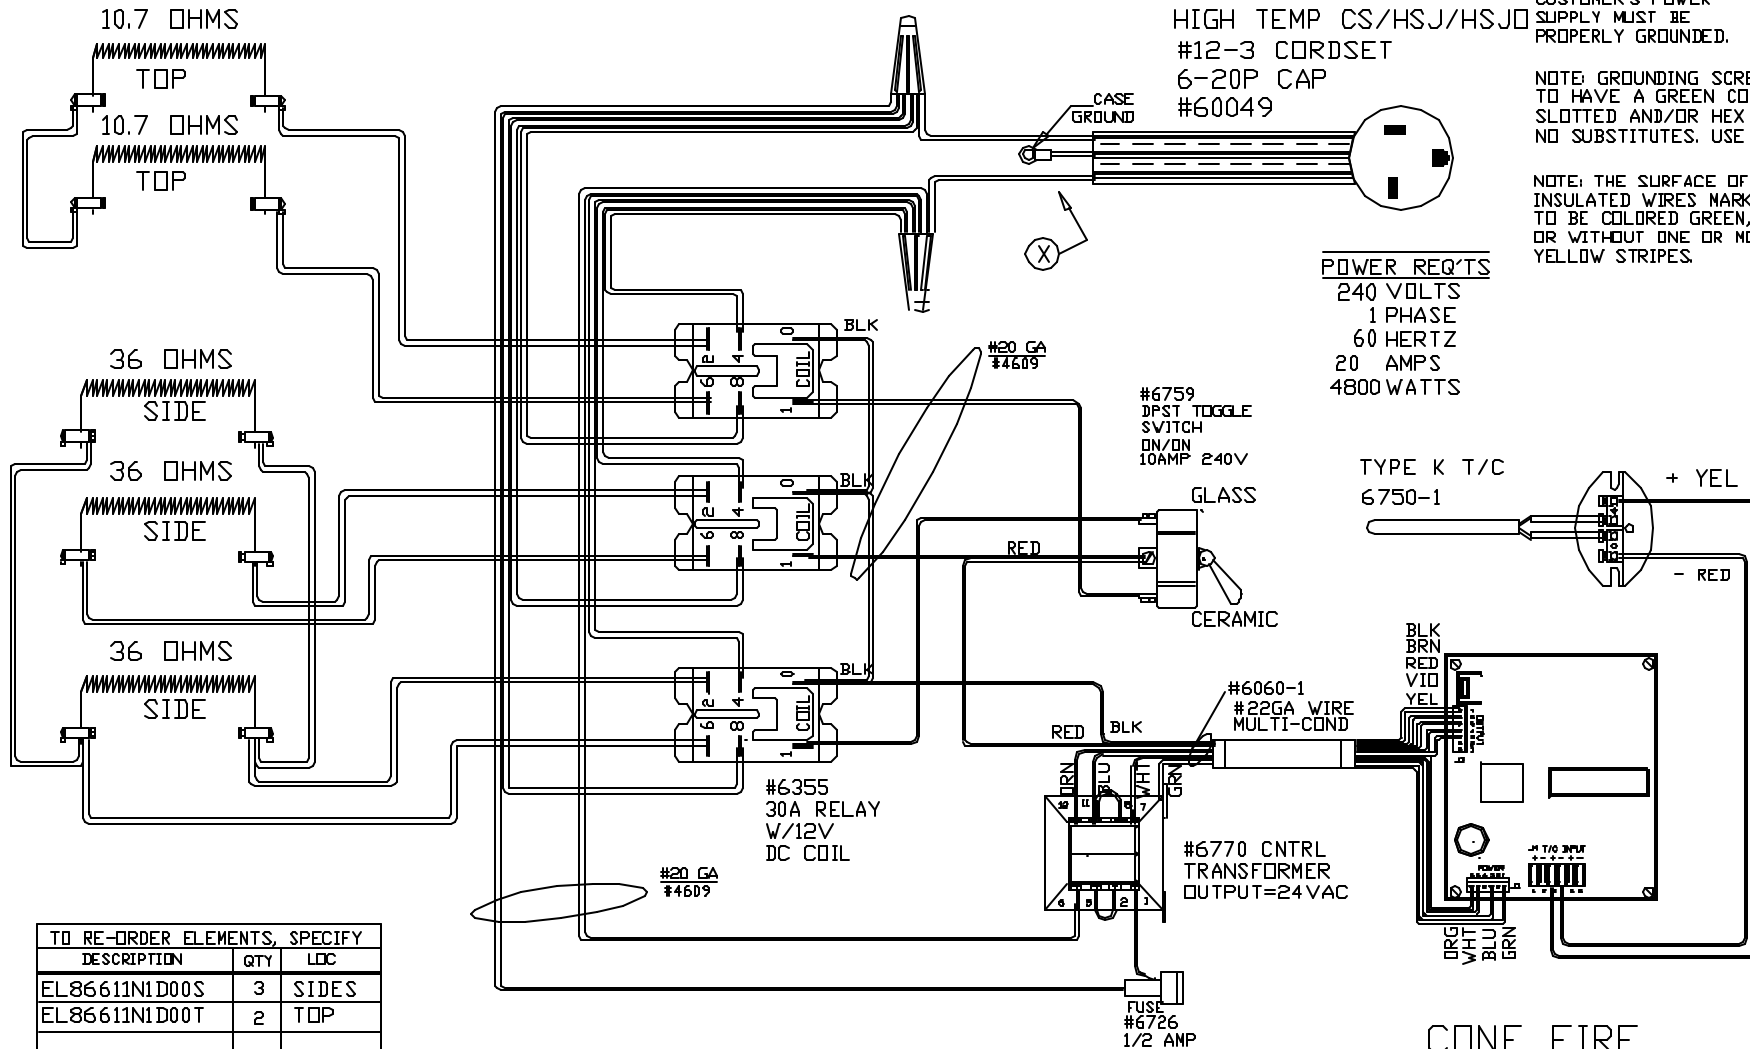

POWER REQ'TS

240 VOLTS
1 PHASE
60 HERTZ
20 AMPS
4800 WATTS

TYPE K T/C
6750-1

TO RE-ORDER ELEMENTS, SPECIFY			
DESCRIPTION	QTY	LOC	
EL86611N1D00S	3	SIDES	
EL86611N1D00T	2	TOP	

CONE FIRE
SENTRY 2.0

I/C
CFG 21
2350° F

REV	DATE	BY	DESCRIPTION
	7/26/04	DTB	

SWITCH BOX ASSY-4978-2

PARAGON INDUSTRIES
2011 SOUTH TOWN EAST BLVD
MESQUITE, TEXAS 75149

WIRING DIAGRAM

240V, 1 PHASE, 60HZ, 4800WATTS

PART NO	REV
86611N1D00	-
DP1613 SEN-C	FILE