

CAUTION

TO PROVIDE CONTINUED PROTECTION AGAINST THE RISK OF ELECTRIC SHOCK, CUSTOMER'S POWER SUPPLY MUST BE PROPERLY GROUNDED.

NOTE: GROUNDING SCREW TO HAVE A GREEN COLORED SLOTTED AND/OR HEX HEAD NO SUBSTITUTES. USE #1005

NOTE: THE SURFACE OF THE

INSULATED WIRES MARKED X TO BE COLORED GREEN, WITH OR WITHOUT ONE OR MORE YELLOW STRIPES.


WIRING NOTE

ALL WIRES #14 AWG, TYPE SEW/SF2 MINIMUM UNLESS OTHERWISE NOTED

CR4

#14-3 CORDSET

5-15P CAP

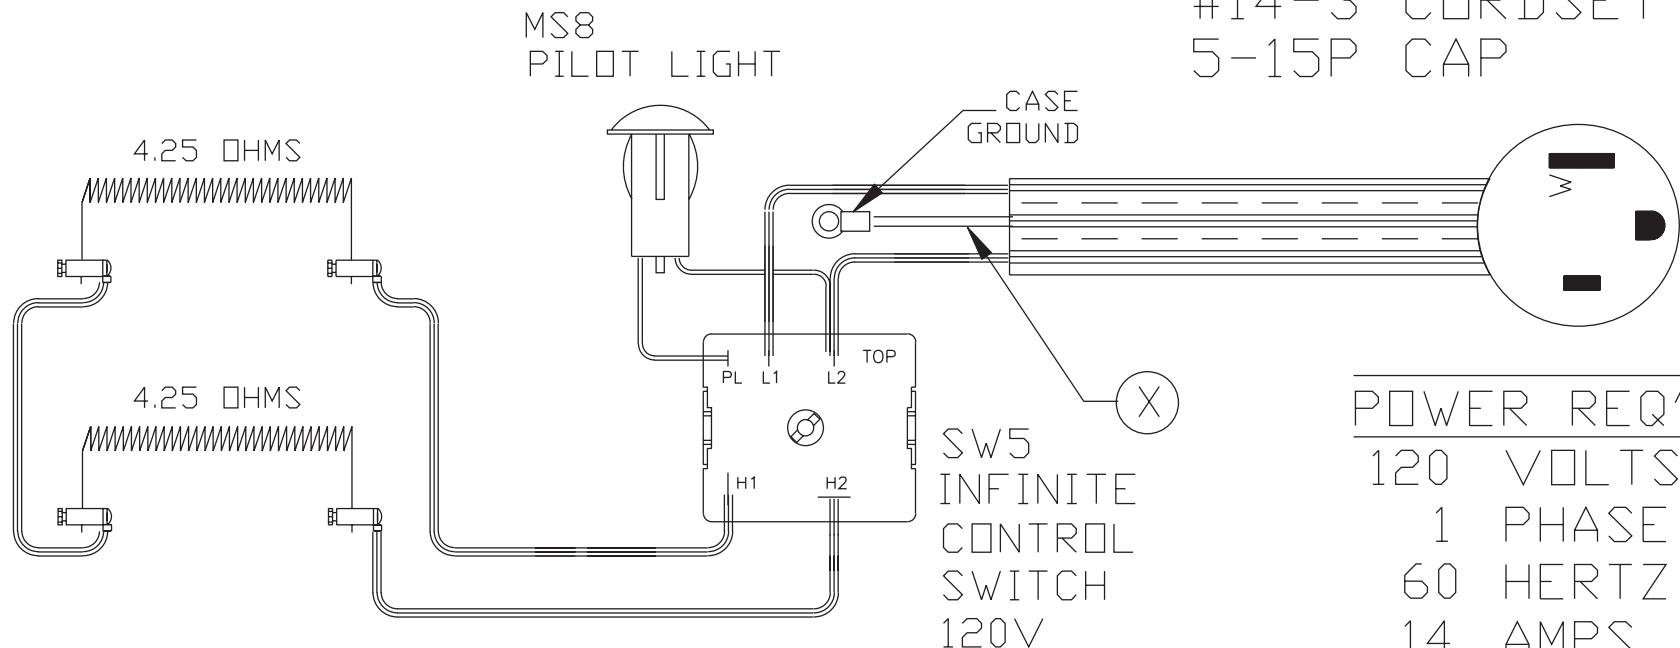

POWER REQ'TS

120 VOLTS
1 PHASE
60 HERTZ
14 AMPS
1680 WATTS

MAX TEMP 2000°F

UL/CUL LISTED

TO RE-ORDER ELEMENTS, SPECIFY		
DESCRIPTION	QTY	LOC
ELE10A	2	SIDES

COMMENTS	PARAGON INDUSTRIES 2011 SOUTH TOWN EAST BLVD MESQUITE, TEXAS 75149	<u>PRODUCT DESCRIPTION</u> 8.5"W, 8.75"H, 9"DP 120V, 1PH, 60HZ, 14A, 1680W	PART NO. E10	REV -
			WIRING DIAGRAM	