

CAUTION


TO PROVIDE CONTINUED PROTECTION AGAINST THE RISK OF ELECTRIC SHOCK, CUSTOMER'S POWER SUPPLY MUST BE PROPERLY GROUNDED.

NOTE: GROUNDING SCREW TO HAVE A GREEN COLORED SLOTTED AND/OR HEX HEAD NO SUBSTITUTES. USE #1005

NOTE: THE SURFACE OF THE INSULATED WIRES MARKED (X) TO BE COLORED GREEN, WITH OR WITHOUT ONE OR MORE YELLOW STRIPES.

WIRING NOTE

ALL WIRES #14 AWG, TYPE SEW/SF2 MINIMUM UNLESS OTHERWISE NOTED

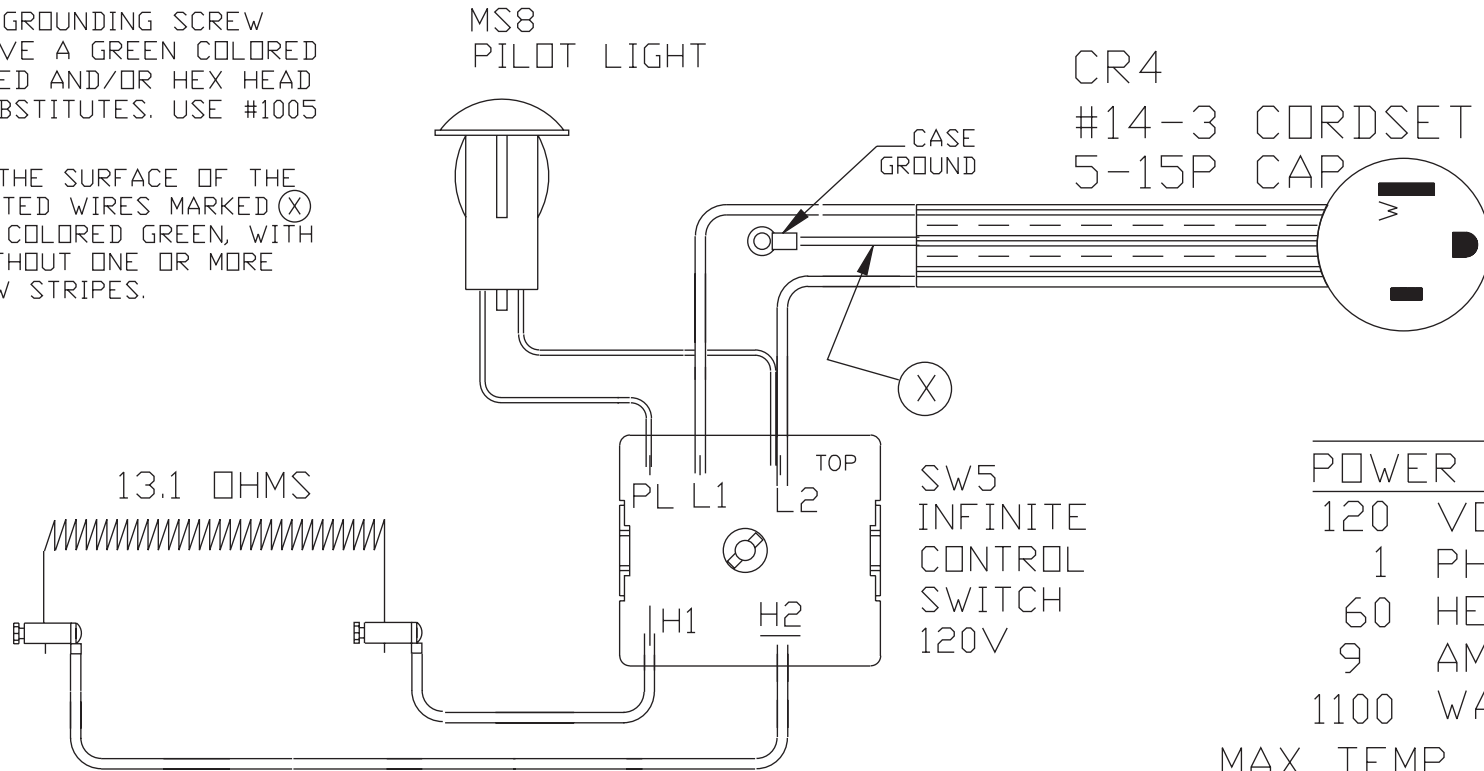

POWER REQ'TS

120 VOLTS
 1 PHASE
 60 HERTZ
 9 AMPS
 1100 WATTS
 MAX TEMP 1650°F

TO RE-ORDER ELEMENTS, SPECIFY		
DESCRIPTION	QTY	LOC
ELE9AX	1	SIDE

UL/CUL LISTED

COMMENTS	PARAGON INDUSTRIES 2011 SOUTH TOWN EAST BLVD MESQUITE, TEXAS 75149	<u>PRODUCT DESCRIPTION</u>		<u>PART NO.</u>	<u>REV</u>
		8.5"W, 4.5"H, 9"DP 120V, 1PH, 60HZ, 9A, 1100W		E9AX	-
					WIRING DIAGRAM