

PART NO PMT13-1

TO RE-ORDER ELEMENTS, SPECIFY		
DESCRIPTION	QTY	LOC
ELPMT13-1S	2	SIDES

CAUTION

TO PROVIDE CONTINUED PROTECTION AGAINST THE RISK OF ELECTRIC SHOCK, CUSTOMER'S POWER SUPPLY MUST BE PROPERLY GROUNDED.



NOTE: GROUNDING SCREW TO HAVE A GREEN COLORED SLOTTED AND/OR HEX HEAD NO SUBSTITUTES. USE #1005

NOTE: THE SURFACE OF THE INSULATED WIRES MARKED (X) TO BE COLORED GREEN, WITH OR WITHOUT ONE OR MORE YELLOW STRIPES.

POWER REQ'TS

208 VOLTS
1 PHASE
60 HERTZ
17 AMPS
3600 WATTS

HIGH TEMP CS/HSJ/HSJD
#12-3 CORDSET
6-20P CAP
#60049

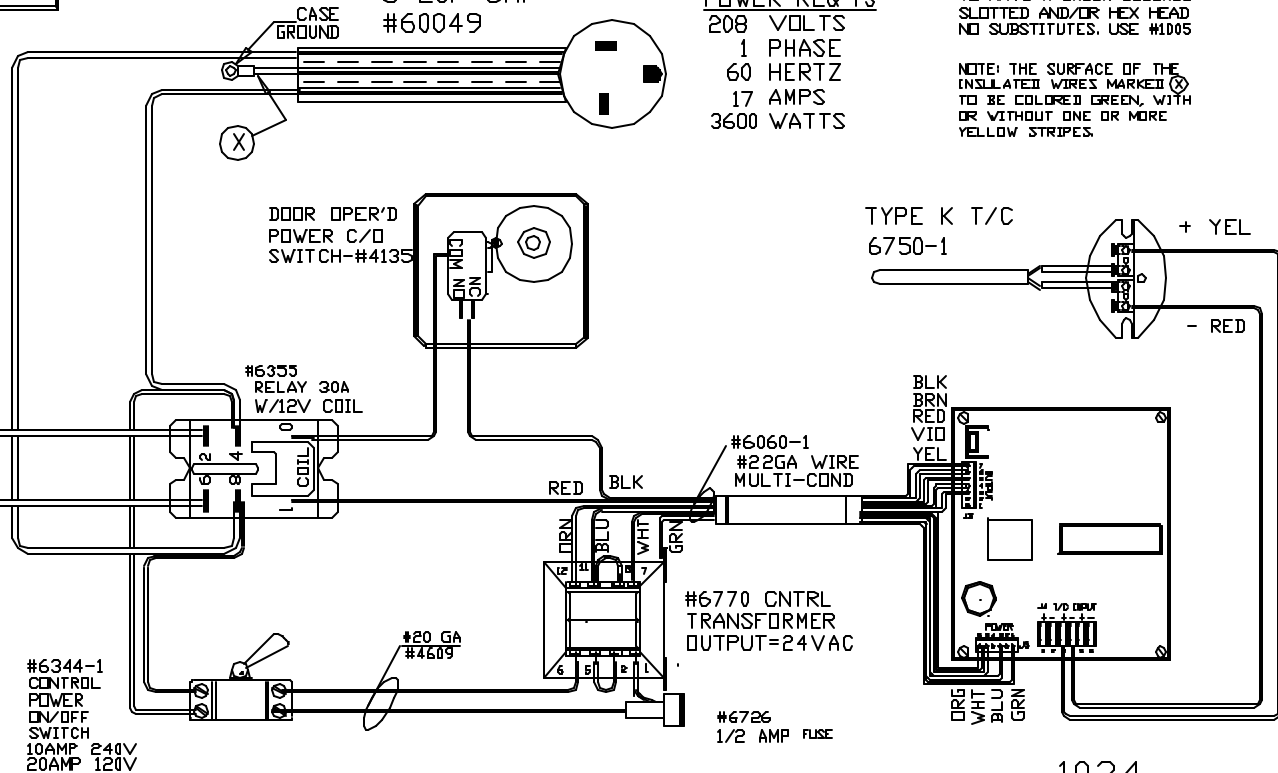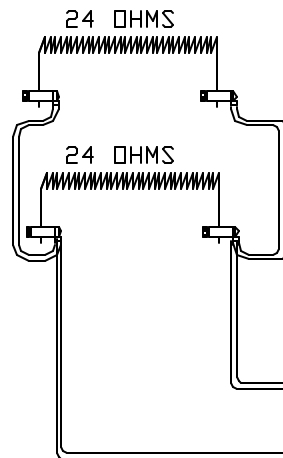

WIRING NOTE

ALL WIRES #14 AWG,
TYPE SEW/SF2 MINIMUM
UNLESS OTHERWISE NOTED

NOTE: PLEASE REFER TO THIS NUMBER WHEN ORDERING PARTS FOR THIS KILN

MAX. TEMP.
2350°F

REV	DATE	BY	DESCRIPTION	SWITCH BOX ASSY- 42073	WIRING DIAGRAM	PART NO	REV
-	1-29-05	RLG		PARAGON INDUSTRIES 2011 SOUTH TOWN EAST BLVD MESQUITE, TEXAS 75149	208V, 1 PHASE ,60HZ 3600WATTS	PMT13-1	-
						HT13X8.5X13.5	FILE