

WIRING NOTE

ALL WIRES #14 AWG,
TYPE SEW/SF2 MINIMUM
UNLESS OTHERWISE NOTED

CAUTION

TO PROVIDE CONTINUED
PROTECTION AGAINST THE
RISK OF ELECTRIC SHOCK,
CUSTOMER'S POWER
SUPPLY MUST BE
PROPERLY GROUNDED.


NOTE: GROUNDING SCREW
TO HAVE A GREEN COLORED
SLOTTED AND/OR HEX HEAD
NO SUBSTITUTES. USE #1005

NOTE: THE SURFACE OF THE
INSULATED WIRES MARKED (X)
TO BE COLORED GREEN, WITH
OR WITHOUT ONE OR MORE
YELLOW STRIPES.

CR14
#12-3 CORDSET
6-20P CAP

POWER REQ'TS

240 VOLTS
1 PHASE
60 HERTZ
15 AMPS
3600 WATTS
MAX TEMP 2300° F

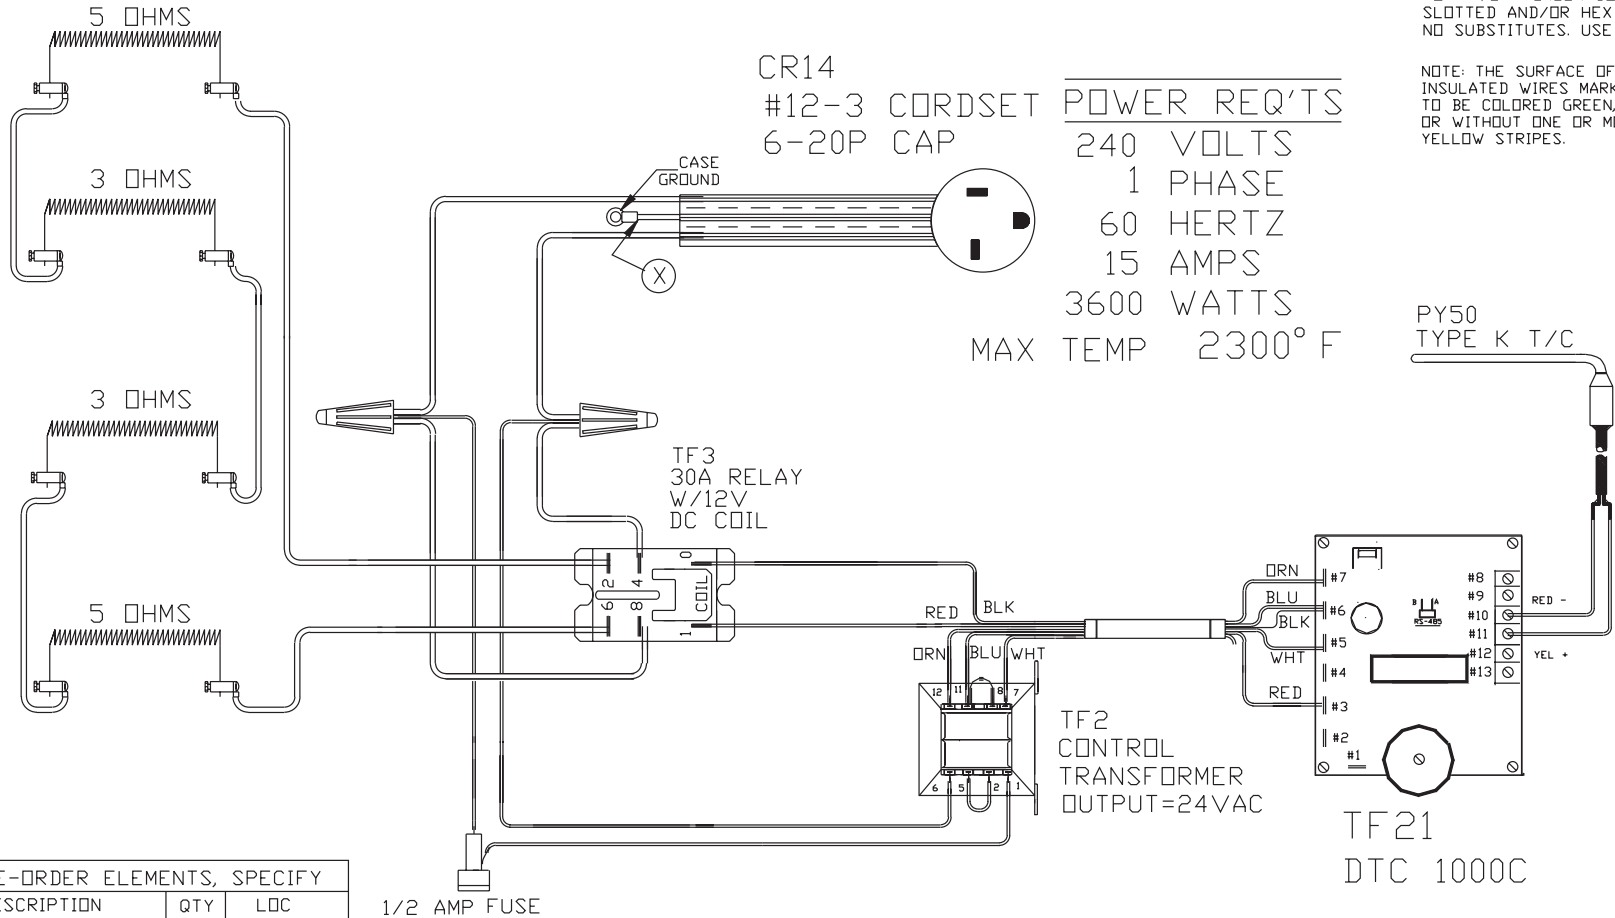

TO RE-ORDER ELEMENTS, SPECIFY		
DESCRIPTION	QTY	LOC
ELTNF66TB	2	TOP&BOT
ELTNF66M	2	MID

UL/CUL LISTED

COMMENTS	PARAGON INDUSTRIES 2011 SOUTH TOWN EAST BLVD MESQUITE, TEXAS 75149	PRODUCT DESCRIPTION 7 SIDES, 14.5" DIA, 13.25" DP 240V, 1PH, 60HZ, 15A, 3600W	PART NO.	TNF66	REV	-
			WIRING DIAGRAM			